


Fiber Patchcord

Features	
Low Insertion Loss	
High Return Loss & High Repeatability	
Application	
LAN, Data network	
CATV Network	
Telecommunication	

Specifications:

Parameter		Value		
Connector Type		FC,SC,ST, LC, MU etc		
Operating wavelength (nm)		1310 or 1550	980 or 1060	780 or 850
Fiber Type		SMF-28e	HI1060 or HI1060Flex	HI780
Insertion loss (dB)		≤ 0.25	≤ 0.4	≤ 0.8
Return loss (dB)	UPC	≥ 50	≥ 50	≥ 50
	APC	≥ 60	≥ 60	≥ 60
Repeatability (dB)		≤ 0.1	/	/
Changeability (dB)		≤ 0.2	/	/
Durability		≥ 1000		
Max.Optical Power(mW)		500		
Operating temperature (°C)		-5 ~ + 75		
Storage Temperature (°C)		-40 ~ + 85		

Package Dimensions:

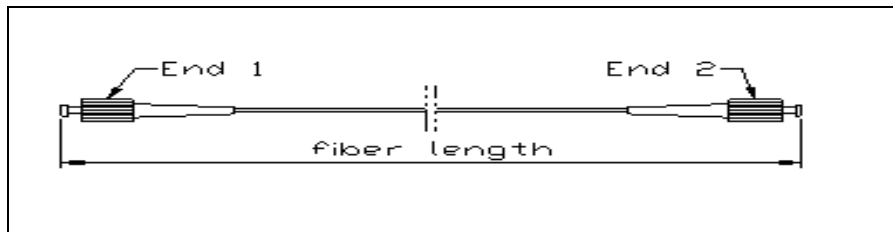

Ordering Information:

JP	Wavelength	0000	Fiber Type	Pigtail Type	Length	Connector1	Connector2
	0780=780nm		1=SMF-28e	1=250um bare fiber	H=0.5m	0=None	0=None
	0850=850nm		4=HI1060 Flex	2=900um loose tube	8=0.8m	1=FC/UPC	1=FC/UPC
	0980=980nm		5=HI1060	3=3mm loose tube	1=1.0m	2=FC/APC	2=FC/APC
	1064=1064nm		6=HI780	4=2mm loose tube	5=1.5m	3=LC/UPC	3=LC/UPC
	1310=1310nm				2=2.0m	4=LC/APC	4=LC/APC
	1550=1550nm				3=3.0m	5=SC/APC	5=SC/APC
					4=4.0m	6=SC/UPC	6=SC/UPC
					A=2.5m		
					B=5.0m		